

КАТАЛОГ ПРОДУКЦИИ

По вопросам продажи и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Казахстан (7273)495-231

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: psq@nt-rt.ru || <https://ipso.nt-rt.ru/>

IPSO WORKS HARD, YOU WORK SMART

The right solution for your needs

IPSO makes it easy for you to reliably get high volumes of high quality laundry for the lowest cost. Our complete range of laundry solutions is designed to maximize your resources and deliver long-term high performance.

IPSO equipment is developed in the world's most sophisticated commercial laundry laboratory. Manufactured with high quality components, our machines thrive in the most demanding environment. IPSO solutions are proven through rigorous testing under real world conditions.

Partner with the world leader in commercial laundry

Your experienced, knowledgeable IPSO team works as hard as you do to help you achieve your goals. We are here for you with advice, parts, service and expertise when you need it.

With IPSO you enjoy all the support of Alliance Laundry Systems. Dedicated solely to laundry, Alliance leads the world in sales, product range, support network and R&D investment.



HOW IPSO DELIVERS SUPERIOR VALUE

Superb results – People want perfect laundry. You'll exceed their expectations with IPSO. Our solutions are designed by hygiene scientists and laundry engineers to perfectly process mountains of laundry quickly and efficiently.

Lower cost – Laundry output is measured in cost per kilogram. Average the equipment price, maintenance costs, labor costs and consumable costs over the life of the machine and IPSO is by far the smartest choice.

Bigger range – Because IPSO offers the biggest range of equipment, you can choose exactly the right unit for your need. That means you don't pay for unused capacity or experience bottlenecks.

Exceptional reliability – To achieve great laundry results your equipment must be powerful enough to wash thoroughly, yet gentle so fabrics last longer. Laundry equipment must deliver an optimum performance under tough conditions for years on end. Check out our reputation and you'll discover IPSO equipment is renowned for reliability.

Friendly operation – Our R&D teams reproduce real laundry conditions to test the usability of our systems. Bigger door openings, easy-to-read feedback and intuitive controls all contribute to the productivity and satisfaction of the people who operate the machines.

Fast service – We'll help you with a regular maintenance plan to keep your laundry in tip-top shape. Our unrivalled partner network and presence in over 100 countries offers professional service and technical support, maintenance and spare parts supply.

Industry-leading 3+2 warranty –

Our confidence in the dependability and robustness of our equipment is reflected in our three-year warranty policy. Plus a two-year warranty extension on critical parts.



As an IPSO customer, our local experts bring you a wide range of laundry support services, including pre-sales consulting, in-house laundry design services, after-sales follow-up and financing solutions.

SMART INNOVATIONS FOR SUPERIOR LAUNDRY

State-of-the-art IPSO technology is tested and proven to raise laundry efficiency and save water, energy and detergent. Our innovations ensure linen lasts longer and make it easier for your laundry team to do a great job.



Optimised energy consumption while washing

The absorption ability of the load is automatically determined at the start of the cycle. Water levels are then optimized throughout the wash cycle with no compromise to the quality of the clean.



Humidity control

Our automatic humidity control and speed management system makes your ironing easier, faster and crisper.



Optimised energy consumption while drying

Save a pile of money each year by eliminating over-drying and maximizing dryer throughput.



Energy savings while drying

Lower energy dryers offer about 5% savings each year and dry a little slower.



Easy control

This user-friendly control allows the operator to see at a glance the temperature, stage and remaining wash cycle time.



Programmable control

Large display panel allowing every step of the washing cycle to be easily modified.



Management software

Comprehensive laundry management software allows the user to remotely monitor and control every aspect of a laundry operation.



Touch screen control

Control with 7" touch screen featuring new connectivity and data-accessibility functionalities through cloud.



Integrated management platform

allowing analysis of financial & operational performance as well as service and maintenance organization.

BUY RIGHT WITH IPSO

How to choose the right laundry solutions

We designed this catalog to make it easy for you to identify the right equipment for your needs. Your IPSO partner is happy to guide you through the options, answer questions and help you get the best value for money.

Laundry solutions designed for your sector

A laundromat has totally different needs to a hospital. Restaurants, hotels, facility managers and care homes have different laundry needs too.

Your IPSO official partner provides you with professional analysis of your specific laundry needs prior to purchase.

Laundromats

Build a brand new laundromat or upgrade an existing laundromat. We'll help you with everything from location, to construction, financing and ongoing support.

Professional

For outsourced laundry operations and dry-cleaners.

Community

Laundry solutions for residential blocks and other shared living spaces

Hospitality

In-house laundry for hotels and guesthouses including coin/card-operated for guests

Catering

Food service industry laundry solutions, from restaurants to processing plants

Healthcare

Specialty solutions for hospitals, clinics and research environments

Institution

Laundry for dormitories, barracks, prisons and other living spaces

Marine

Shipboard solutions for laundry on the high seas



IPSO CONNECT

DIGITAL LAUNDROMAT SOLUTION



Intuitive, real-time laundromat data that's custom-made for the way you operate.

Our Digital Monitoring Solution gives you the reporting, monitoring and configuration capabilities you need to do what you do best: **make intelligent business decisions.**

Our intuitive interface and easy-to-use tools, including a dashboard to see all the aspects of your business and an app for your customers; gives you maximum oversight of your business which leads to maximum efficiency, and of course, maximum profit.



IPSO CONNECT DASHBOARD TO MONITOR YOUR BUSINESS

- Interactive dashboards can be configured to show revenue, turns and a host of other values.
- Exportable Excel stats of the machines usage and performance for further analysis.
- Customizable date range to allow view by day, week, month, etc.
- Reset washing and drying machines if they are blocked.
- Manage the lights, fences and more, if they have been connected to the domotic device.

IPSO CONNECT FOR YOUR CUSTOMERS

- Pay by card using the IPSO Connect application.
- Show the available washers and dryers and choose the program.
- Offer free washing and drying to your customers.
- Send notifications about promotions and events.
- Receive suggestions and comments about the experience of your customers in your laundromat.



OUR MISSION: A LAUNDROMAT THAT'S AS SMART AS YOU ARE



IPSO Connect gives you the reporting, monitoring and configuration capabilities you need to do what you do best: *make intelligent business decisions.*



REAL-TIME
PERFORMANCE
DATA



REMOTE
START & SYSTEM
MONITORING



TURNS
PER DAY



REBOOT
MACHINES
FROM THE
DASHBOARD



MOBILE APP
FOR YOUR
CUSTOMERS



SEND
NOTIFICATIONS
THROUGH THE
APP



13kg
WASHER-EXTRACTOR:
RESTART MACHINE

18kg
WASHER-EXTRACTOR:
FREE WASHING CYCLE

PEAK CUSTOMER
USAGE: **FRIDAY**

COMPATIBLE WITH:

- IY Washers and all dryers
- Most central payment systems



SOFT MOUNTED
WASHER-EXTRACTORS



TUMBLE DRYER

LAUNDRY PEACE-OF-MIND FROM THE WORLD LEADER

Choosing IPSO gives you access to the resources of Alliance Laundry Systems for all your laundry solutions needs in the days, months and years ahead.

Alliance Laundry Systems makes the world cleaner as the premier provider of laundry solutions. We deliver leading performance in commercial laundry through our family of brands, including IPSO. Laundry is our sole business.

Alliance leads the world in commercial laundry sales, product range, global reach and R&D investment. We serve more than 140 countries with a team of more than 3,000. Check out the advantages you enjoy with us:





Superior technology

The world needs faster, easier, better laundry. In recent years, we've invested over USD300 million in R&D to make it happen. Our global team of laundry scientists, engineers and designers are dedicated to purpose-driven laundry innovation.

Business and financial services

We aim to make laundry as cost-effective and rewarding as possible. In some regions we support our customers with comprehensive financial services. In the past 20 years, we have helped laundry entrepreneurs grow with over USD2 billion in loans.

Stronger network

You're never too far from better laundry, thanks to expert Alliance teams in 14 strategic locations worldwide and over 1,200 specialist commercial laundry distributors. No matter where in the world you are, big help with big laundry is always within reach.

Comprehensive training


Alliance Laundry Systems University (ALSU) offers training for everyone involved in the laundry process. Our laundry learning programs include operator training, service schools, maintenance seminars, business training and much more.

Award-winning customer support

Our outstanding customer service is dedicated to helping you develop the most efficient laundry operation possible— and keeping it running at peak efficiency. Order Alliance Genuine Parts today and experience our exceptional service for yourself.

Measurably better

To get the excellence you deserve, you can rate our services at every interaction. If you're not happy, let us know and we'll make it better. Were we helpful? Share your approval. Our team thrives on delivering a positive experience. Understanding your satisfaction helps us improve our performance.



PRODUCT RANGE OVERVIEW

SEMI-COMMERCIAL EQUIPMENT



CW 10



CD 10



CS 10



SC65



DAM 6-DAMC6-DAM6 HP

HARDMOUNT WASHERS



IA80-105-135



IA180-240-280



IA332-520



BC20-30



BC40-50-60



BC80-100

SOFTMOUNT WASHERS



IY65-80-105



IY135-180-240-280



IY350-450-600



IY800-1000-1200

BARRIER WASHERS



IH180



IH240-280



IMB360-500



IMB700



IB700-900



IB1100-1400-1800

TUMBLE DRYERS



DR30-35-50-55S-75

DR120-170-200

DR335-445

I190*

I250-285-350*

I530-680*

I195*

HEAT PUMP TUMBLERS



IHP190

IHP250-285 -345

I195HP*

CHEST HEATED IRONERS



ACL80K

ACL370-500-600-800

ACL80K-2ROLLS

I25

I30

CYLINDER HEATED IRONERS



FCI320

FCI500

FCIR500-FCIF500

FCIFF500

FCI800

SOFTMOUNT WASHER-EXTRACTORS

IY65 | IY80 | IY105 | IY135 | IY180 | IY240 | IY280

Soft mounted washer-extractors are built to extend linen life, reduce water usage and utility costs, and maximize productivity. The heavy-duty construction provides dependable operation and assures your equipment will be in service for years to come.

IDEAL FOR

- Hotels
- Restaurants
- Hospitals
- Nursing Homes
- Laundromats
- Industrial laundries
- Cleaning companies
- Spa & Wellness
- Sport clubs
- Campings
- Public sector institutions
- Apartment buildings
- Universities
- Marine
- Wet-cleaning

SMART TECHNOLOGY



Optimised energy consumption



Easy control



Programmable control



Management software



Integrated management platform



Touch screen control

COMPLETE WITH

- Stainless steel top and front panel, black side panels
- Stainless steel drum and tub
- Aries easy-to-use microprocessor
- Patented soap hopper
- Large drain valve (Ø76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading and unloading
- High capacity water inlets (IY280)



Ergonomical Construction



Large door opening



Low water consumption



Low energy consumption

OPTIONAL ENHANCEMENTS

- Aries Elite: fully programmable control
- Evolis touch screen control
- Coin-operation
- Stainless steel side panels
- USB plug (on the back panel)
- Liquid soap connection
- Liquid soap pump
- Water recovery kit
- Steam heating version
- Drain pump (IY65, IY80)
- 3rd water inlet
- High capacity water inlets (IY180, IY240)



In this picture IY65-280

| | IY65 | IY80 | IY105 | IY135 |
|------------------------------|---------------------|---------------------|---------------------|---------------------|
| INNERDRUM | | | | |
| CAPACITY 10:1 | 6,5 kg | 8 kg | 11 kg | 14 kg |
| CAPACITY 9:1 | 7 kg | 9 kg | 12 kg | 15 kg |
| VOLUME | 65 L | 75 L | 105 L | 135 L |
| DIAMETER | 530 mm | 530 mm | 620 mm | 620 mm |
| DRUM SPEED | | | | |
| WASH | 49 rpm | 49 rpm | 49 rpm | 49 rpm |
| EXTRACTION | 1165 rpm | 1165 rpm | 1075 rpm | 1075 rpm |
| G-FACTOR | 400 | 400 | 400 | 400 |
| HEATING | | | | |
| ELECTRICITY | 6 KW | 6 KW | 9 KW | 12 KW |
| STEAM | 1-8 bar | 1-8 bar | 1-8 bar | 1-8 bar |
| HOT WATER | 90° C | 90° C | 90° C | 90° C |
| SOUND PRESSURE LEVEL DB | < 65 dB (A) | < 65 dB (A) | < 65 dB (A) | < 65 dB (A) |
| WATER VALVE CONNECTION | 3/4" BSP | 3/4" BSP | 3/4" BSP | 3/4" BSP |
| WATER PRESSURE | 100-800 kPA | 100-800 kPA | 100-800 kPA | 100-800 kPA |
| REC. WATER PRESSURE | 300-500 kPA | 300-500 kPA | 300-500 kPA | 300-500 kPA |
| WATER INLET | 20 L/min | 20 L/min | 20 L/min | 20 L/min |
| DRAIN VALVE OUTER | Ø 76 mm | Ø 76 mm | Ø 76 mm | Ø 76 mm |
| FLOW AMOUNT WITH DRAIN VALVE | 210 L/min | 210 L/min | 210 L/min | 210 L/min |
| STEAM VALVE CONNECTION | 1/2" BSP | 1/2" BSP | 1/2" BSP | 1/2" BSP |
| STEAM PRESSURE | 100-800 kPA | 100-800 kPA | 100-800 kPA | 100-800 kPA |
| TRANSPORT DATA | | | | |
| NET WEIGHT | 170 kg | 185 kg | 210 kg | 255 kg |
| MACHINE DIMENSIONS H X W X D | 1135 x 710 x 740 mm | 1135 x 790 x 710 mm | 1245 x 795 x 795 mm | 1245 x 795 x 945 mm |
| PACKING DIMENSIONS H X W X D | 1265 x 750 x 840 mm | 1365 x 835 x 840 mm | 1365 x 835 x 840 mm | 1365 x 835 x 985 mm |
| | | | | |

| | IY180 | IY240 | IY280 |
|------------------------------|-----------------------|-----------------------|-----------------------|
| INNERDRUM | | | |
| CAPACITY 10:1 | 18 kg | 24 kg | 28 kg |
| CAPACITY 9:1 | 20 kg | 27 kg | 31 kg |
| VOLUME | 180 L | 240 L | 280 L |
| DIAMETER | 750 mm | 750 mm | 750 mm |
| DRUM SPEED | | | |
| WASH | 42 rpm | 42 rpm | 42 rpm |
| EXTRACTION | 980 rpm | 980 rpm | 915 rpm |
| G-FACTOR | 400 | 400 | 350 |
| HEATING | | | |
| ELECTRICITY | 12 KW | 18 KW | 22 KW |
| STEAM | 1-8 bar | 1-8 bar | 1-8 bar |
| HOT WATER | 90° C | 90° C | 90° C |
| SOUND PRESSURE LEVEL | < 65 dB (A) | < 65 dB (A) | < 65 dB (A) |
| WATER VALVE CONNECTION | 3/4" BSP | 3/4" BSP | 3/4" BSP |
| WATER PRESSURE | 100-800 kPA | 100-800 kPA | 100-800 kPA |
| REC. WATER PRESSURE | 300-500 kPA | 300-500 kPA | 300-500 kPA |
| WATER INLET | 20 L/min | 20 L/min | 20 L/min |
| DRAIN VALVE OUTER | Ø 76 mm | Ø 76 mm | Ø 76 mm |
| FLOW AMOUNT WITH DRAIN VALVE | 210 L/min | 210 L/min | 210 L/min |
| STEAM VALVE CONNECTION | 1/2" BSP | 1/2" BSP | 1/2" BSP |
| STEAM PRESSURE | 100-800 kPA | 100-800 kPA | 100-800 kPA |
| TRANSPORT DATA | | | |
| NET WEIGHT | 380 kg | 430 kg | 495 kg |
| MACHINE DIMENSIONS H X W X D | 1430 x 970 x 970 mm | 1430 x 970 x 1105 mm | 1430 x 970 x 1185 mm |
| PACKING DIMENSIONS H X W X D | 1570 x 1025 x 1015 mm | 1570 x 1025 x 1150 mm | 1570 x 1025 x 1225 mm |
| | | | |

SOFTMOUNT WASHER-EXTRACTORS

IY350 | IY450 | IY600 | IY800 | IY1000 | IY1200

Soft mounted washer-extractors are built to extend linen life, reduce water usage and utility costs, and maximize productivity. The heavy-duty construction provides dependable operation and assures your equipment will be in service for years to come.

IDEAL FOR

- Hotels
- Hospitals
- Nursing Homes
- Industrial laundries
- Cleaning companies
- Public sector institutions
- Marine

SMART TECHNOLOGY



Optimised energy consumption



Easy control



Programmable control



Management software

COMPLETE WITH

- Stainless steel cabinet
- Stainless steel drum and tub
- Aries Elite - fully programmable microprocessor
- Patented soap hopper
- 2 large drain valves
- Easy access to all vital parts from the front
- Frequency controlled motor
- Large door opening for easy loading and unloading
- Perforated lifting ribs
- Soap hopper with 5 removable compartments
- Eco washing programs: reduces water and electricity consumption



Ergonomical Construction



Large door opening



Low water consumption



Low energy consumption

OPTIONAL ENHANCEMENTS

- Liquid soap pumps
- Aries Assist
- Forward and backward tilting by external platform (IY800-1000-1200)



In this picture IY350-450-600

| | IY350 | IY450 | IY600 |
|------------------------------|-----------------------|--|-----------------------|
| INNERDRUM | | | |
| CAPACITY 10:1 | 35 kg | 45 kg | 60 kg |
| CAPACITY 9:1 | 39 kg | 50 kg | 67 kg |
| VOLUME | 350 L | 450 L | 600 L |
| DIAMETER | 914 mm | 914 mm | 1035 mm |
| DRUM SPEED | | | |
| WASH | 45 rpm | 45 rpm | 42 rpm |
| EXTRACTION | 839 rpm | 839 rpm | 788 rpm |
| G-FACTOR | | 360 | |
| PROGRAMMER | | | |
| ARIES ELITE | | standard | |
| HEATING | | | |
| 100% HOT WATER | | 90° C | |
| 100% ELECTRICAL | 24 kW | 36 kW | 54 kW |
| STEAM HIGH PRESSURE | | 3-8 bar | |
| CONNECTION | | | |
| ELECTRICAL | | 3 x 200-240/50-60Hz 3 x 380-415/50-60Hz 3 x 440-480/50-60 Hz | |
| WATER INLET | | 3 x 25 (1") | |
| STEAM INLET | | 19 (3/4") | |
| DRAIN DIAMETER | | 2 x 76 mm (3") | |
| TRANSPORT DATA | | | |
| NET WEIGHT | 1010 kg | 1350 kg | 1500 kg |
| MACHINE DIMENSIONS H X W X D | 1925 x 1315 x 1270 mm | 1925 x 1315 x 1502 mm | 1925 x 1315 x 1502 mm |
| PACKING DIMENSIONS H X W X D | | 2125 x 1425 x 1700 mm | |

| | IY800 | IY1000 | IY1200 |
|------------------------------|-----------------------|--|-----------------------|
| INNERDRUM | | | |
| CAPACITY 10:1 | 80 kg | 100 kg | 120 kg |
| CAPACITY 9:1 | 89 kg | 111 kg | 133 kg |
| VOLUME | 807 L | 1003 L | 1180 L |
| DIAMETER | 1110 mm | 1200 mm | 1300 mm |
| DRUM SPEED | | | |
| WASH | 36 rpm | 33 rpm | 32 rpm |
| EXTRACTION | 750 rpm | 720 rpm | 695 rpm |
| G-FACTOR | | 350 | |
| PROGRAMMER | | | |
| ARIES ELITE | | standard | |
| HEATING | | | |
| ELECTRICITY | 67,5 kW | - | - |
| STEAM HIGH PRESSURE | | 3-8 bar | |
| CONNECTION | | | |
| ELECTRICAL | | 3 x 200-240/50-60HZ 3 x 380-480/50-60Hz | |
| WATER INLET | | 3 x 38 (1 1/2") | |
| STEAM INLET | | 25 (1") | |
| DRAIN DIAMETER | | 2 x 103 mm (4") | |
| TRANSPORT DATA | | | |
| NET WEIGHT | 2640 kg | 3170 kg | 3480 kg |
| MACHINE DIMENSIONS H X W X D | 1985 x 1495 x 1940 mm | 2060 x 1790 x 2005 mm | 2085 x 1855 x 2085 mm |
| PACKING DIMENSIONS H X W X D | 2200 x 1690 x 1950 mm | 2345 x 1865 x 2125 mm | 2340 x 2000 x 2170 mm |

HARDMOUNT WASHERS*

[*check regional availability]

IA80 | IA105 | IA135 | IA180 | IA240 | IA280 | IA332 | IA520

IPSO's hardmount washer extractors are secured to the concrete floor, cost significantly less than their softmount counterparts and have a proven record of dependability with superior wash results.

IDEAL FOR

- Hotels
- Restaurants
- Hospitals
- Nursing Homes
- Laundromats
- Industrial laundries
- Cleaning companies
- Spa & Wellness
- Sport clubs
- Campings
- Public sector institutions
- Apartment buildings
- Universities
- Marine

SMART TECHNOLOGY



Optimised energy consumption



Easy control



Programmable control




Management software



Integrated management platform

COMPLETE WITH

- Rigid mounted, normal spin
- Stainless steel top and front panel, black side panels
- Stainless steel drum and tub
- Aries – easy to use microprocessor
- Patented soap hopper
- Large drain valve (Ø76 mm – IA332-520 : 2 drain valves Ø76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- High capacity water inlets (IA280)



Ergonomical Construction



Large door opening



Low water consumption



Low energy consumption

OPTIONAL ENHANCEMENTS

- Aries Elite - fully programmable
- Coin operated
- Stainless steel side panels
- USB plug (on the back panel)
- Liquid soap connection
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- Drain pump (IA80)
- 3rd water inlet
- High capacity water inlets (IA180, IA240)



In this picture IA80-280

| | IA80 | IA105 | IA135 | IA180 |
|------------------------------|---------------------|---------------------|---------------------|-----------------------|
| INNERDRUM | | | | |
| CAPACITY 10:1 | 8 kg | 11 kg | 14 kg | 18 kg |
| CAPACITY 9:1 | 9 kg | 12 kg | 15 kg | 20 kg |
| VOLUME | 75 L | 105 L | 135 L | 180 L |
| DIAMETER | 530 mm | 620 mm | 620 mm | 750 mm |
| DRUM SPEED | | | | |
| WASH | 50 rpm | 46 rpm | 46 rpm | 42 rpm |
| EXTRACTION | 820 rpm | 760 rpm | 760 rpm | 490 rpm |
| G-FACTOR | 200G | 200G | 200G | 100 G (optional 200G) |
| HEATING | | | | |
| ELECTRICITY | 6 KW | 9 KW | 12 KW | 12 KW |
| STEAM | 1-8 bar | 1-8 bar | 1-8 bar | 1-8 bar |
| HOT WATER | 90° C | 90° C | 90° C | 90° C |
| SOUND PRESSURE LEVEL | < 65 dB (A) | < 65 dB (A) | < 65 dB (A) | < 65 dB (A) |
| WATER VALVES CONNECTION | 3/4" BSP | 3/4" BSP | 3/4" BSP | 3/4" BSP |
| WATER PRESSURE | 100-800 kPa | 100-800 kPa | 100-800 kPa | 100-800 kPa |
| REC. WATER PRESSURE | 300-500 kPa | 300-500 kPa | 300-500 kPa | 300-500 kPa |
| WATER INLET | 20 L/min | 20 L/min | 20 L/min | 20 L/min |
| DRAIN VALVE OUTER | Ø 76 mm | Ø 76 mm | Ø 76 mm | Ø 76 mm |
| FLOW AMOUNT WITH DRAIN | 210 L/min | 210 L/min | 210 L/min | 210 L/min |
| STEAM VALVE CONNECTION | 1/2" BSP | 1/2" BSP | 1/2" BSP | 1/2" BSP |
| STEAM PRESSURE | 100-800 kPa | 100-800 kPa | 100-800 kPa | 100-800 kPa |
| TRANSPORT DATA | | | | |
| NET WEIGHT | 135 kg | 170 kg | 190 kg | 255 kg |
| MACHINE DIMENSIONS H X W X D | 1115 x 660 x 785 mm | 1225 x 750 x 785 mm | 1225 x 750 x 900 mm | 1410 x 890 x 915 mm |
| PACKING DIMENSIONS H X W X D | 1245 x 710 x 835 mm | 1355 x 800 x 835 mm | 1355 x 800 x 950 mm | 1550 x 925 x 970 mm |
| | | | | |

| | IA240 | IA280 | IA332 | IA520 |
|------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| INNERDRUM | | | | |
| CAPACITY 10:1 | 24 kg | 28 kg | 35 kg | 52 kg |
| CAPACITY 9:1 | 27 kg | 31 kg | 39 kg | 58 kg |
| VOLUME | 240 L | 280 L | 332 L | 520 L |
| DIAMETER | 750 mm | 750 mm | 914 mm | 914 mm |
| DRUM SPEED | | | | |
| WASH | 42 rpm | 42 rpm | 38 rpm | 38 rpm |
| EXTRACTION | 490 rpm | 490 rpm | 540 rpm | 440 rpm |
| G-FACTOR | 100 G (optional 200G) | 100 G (optional 200G) | 150 G | 100 G |
| HEATING | | | | |
| ELECTRICITY | 18 KW | 22 KW | 2,2 KW | 4,0 KW |
| STEAM | 1-8 bar | 1-8 bar | 1-8 bar | 1-8 bar |
| HOT WATER | 90° C | 90° C | 90° C | 90° C |
| SOUND PRESSURE LEVEL | < 65 dB (A) | < 65 dB (A) | < 65 dB (A) | < 65 dB (A) |
| WATER VALVES CONNECTION | 3/4" BSP | 3/4" BSP | 3/4" BSP | 3/4" BSP |
| WATER PRESSURE | 100-800 kPa | 100-800 kPa | 100-800 kPa | 100-800 kPa |
| REC. WATER PRESSURE | 300-500 kPa | 300-500 kPa | 300-500 kPa | 300-500 kPa |
| WATER INLET | 20 L/min | 20 L/min | 66-188 L/min | 183-518 L/min |
| DRAIN VALVE OUTER | Ø 76 mm | Ø 76 mm | Ø 2 x 76 mm | Ø 2 x 76 mm |
| FLOW AMOUNT WITH DRAIN | 210 L/min | 210 L/min | 2 x 210 L/min | 2 x 210 L/min |
| STEAM VALVE CONNECTION | 1/2" BSP | 1/2" BSP | 3/4" BSP | 3/4" BSP |
| STEAM PRESSURE | 100-800 kPa | 100-800 kPa | 100-800 kPa | 100-800 kPa |
| TRANSPORT DATA | | | | |
| NET WEIGHT | 275 kg | 290 kg | 410 kg | 520 kg |
| MACHINE DIMENSIONS H X W X D | 1410 x 890 x 1060 mm | 1410 x 890 x 1135 mm | 1500 x 1060 x 1030 mm | 1500 x 1060 x 1315 mm |
| PACKING DIMENSIONS H X W X D | 1550 x 925 x 1130 mm | 1550 x 925 x 1190 mm | 1625 x 1088 x 1060 mm | 1625 x 1088 x 1345 mm |
| | | | | |

CABINET HARDMOUNT WASHERS*

BC20 | BC30 | BC40 | BC60 | BC80 | BC100

[*check regional availability]

IPSO's BC-range of hardmount washer-extractors features 200 G-Force extraction speeds, resulting in reduced dry times and increased throughput.

IDEAL FOR

- Hotels
- Restaurants
- Hospitals
- Nursing Homes
- Laundromats
- Industrial laundries
- Cleaning companies
- Spa & Wellness
- Sport clubs
- Campings
- Public sector institutions
- Apartment buildings
- Universities
- Marine

SMART TECHNOLOGY



Easy control



Programmable control



Management software



Integrated management platform

COMPLETE WITH

- Hard-mount, medium spin, up to 200 G-factor
- Stainless steel front panel & door, skin plate side panels
- Robotically welded frame
- Stainless steel drum and tub
- Control: ARIES MICRO OPL – easy to use microprocessor
- 4-compartment soap box
- One piece cast bearing housing: long life span
- Heavy duty variable speed motor: smooth start and stop
- Patented system for detecting leaking valves
- Durable door latch and lock mechanism
- Large door opening: easy loading & unloading



Ergonomical Construction



Large door opening



Low water consumption



Low energy consumption

OPTIONAL ENHANCEMENTS

- ARIES Micro VEND – 4 cycles
- Stainless steel side panels
- Liquid soap pumps



In this picture BC20-100

| | BC20 | BC30 | BC40 |
|------------------------------|---------------------|---------------------|----------------------|
| INNERDRUM | | | |
| CAPACITY | 9 kg | 13 kg | 18 kg |
| VOLUME | 79,3 l | 119 l | 178 l |
| DIAMETER | Ø533 mm | Ø610 mm | Ø668 mm |
| DRUM SPEED | | | |
| WASH | 51 rpm | 48 rpm | 46 rpm |
| EXTRACTION | 580-819 rpm | 542-766 rpm | 518-733 rpm |
| G-FACTOR | 100-200G | 100-200G | 100-200G |
| DOOR OPENING SIZE | 295 mm | 363 mm | 414 mm |
| DOOR BOTTOM TO FLOOR | 365 mm | 356 mm | 370 mm |
| WATER INLET CONNECTION | 9 mm | 19 mm | 19 mm |
| MOTOR POWER CONSUMPTION | 0,75 kW | 0,75 kW | 1,50 kW |
| HEATING | | | |
| ELECTRIC (240V) | 7,8kW | 7,8 kW | 15,6kW |
| ELECTRIC (380V) | 6,5kW | 6,5kW | 13,0kW |
| STEAM | 1-8 bar | 1-8 bar | 1-8 bar |
| HOT WATER | 90°C | 90°C | 90°C |
| NOISE LEVEL (dBA) | | | |
| WASH | 58 | 58 | 58 |
| EXTRACTION 100G | 56 | 56 | 58 |
| EXTRACTION 200G | 61 | 65 | 65 |
| DRAIN VALVE OUTER | Ø52mm | Ø 52 mm | Ø 76 mm |
| STEAM INLET CONNECTION | N/A | N/A | ½" |
| STEAM PRESSURE | N/A | N/A | 570 kPa |
| TRANSPORT DATA | | | |
| NET WEIGHT | 154 kg | 200 kg | 245 kg |
| MACHINE DIMENSIONS H X W X D | 1120 x 660 x 784 mm | 1171 x 737 x 896 mm | 1227 x 778 x 1073 mm |
| PACKING DIMENSIONS H X W X D | 1255 x 711 x 859 mm | 1303 x 800 x 973 mm | 1361 x 826 x 1105 mm |

| | BC60 | BC80 | BC100 |
|------------------------------|----------------------|-----------------------|-----------------------|
| INNERDRUM | | | |
| CAPACITY | 27 kg | 36 kg | 45 kg |
| VOLUME | 255 l | 365 l | 430 l |
| DIAMETER | Ø762 mm | Ø914 mm | Ø914 mm |
| DRUM SPEED | | | |
| WASH | 43 rpm | 39 rpm | 39 rpm |
| EXTRACTION | 485-685 rpm | 443 – 626 rpm | 443-568 rpm |
| G-FACTOR | 100-200G | 100- 200G | 100-165G) |
| DOOR OPENING SIZE | 414 mm | 470 mm | 470 mm |
| DOOR BOTTOM TO FLOOR | 379 mm | 455 mm | 455 mm |
| WATER INLET CONNECTION | 19 mm | 19 mm | 19 mm |
| MOTOR POWER CONSUMPTION | 2,25 kW | 3,75 kW | 3,75 kW |
| HEATING | | | |
| ELECTRIC (240V) | 15,6kW | 27,4 kW | 27,4kW |
| ELECTRIC (380V) | 13,0kW | 17,2kW | 17,2kW |
| STEAM | 1-8 bar | 1-8 bar | 1-8 bar |
| HOT WATER | 90°C | 90°C | 90°C |
| NOISE LEVEL (dBA) | | | |
| WASH | 58 | 60 | 64 |
| EXTRACTION 100G | 60 | 67 | 69 |
| EXTRACTION 200G | 65 | 73 | 73 |
| DRAIN VALVE OUTER | Ø 76 mm | Ø 76 mm | Ø 76 mm |
| STEAM INLET CONNECTION | ½" | ½" | ½" |
| STEAM PRESSURE | 570 kPa | 570 kPa | 570 kPa |
| TRANSPORT DATA | | | |
| NET WEIGHT | 308 kg | 567 kg | 581 kg |
| MACHINE DIMENSIONS H X W X D | 1295 x 865 x 1135 mm | 1481 x 1054 x 1196 mm | 1481 x 1054 x 1298 mm |
| PACKING DIMENSIONS H X W X D | 1430 x 953 x 1191 mm | 1514 x 1118 x 1384 mm | 1514 x 1118 x 1486 mm |

BARRIER WASHERS

IH180 | IH240 | IH280 | IMB360 | IMB500 | IMB700

The range of industrial hygienic barrier-washers are designed for healthcare environments. Their goal is to prevent microbiological contamination during the washing process, while combining performance, strength and energy-saving.

IDEAL FOR

- Hospitals
- Nursing Homes
- Industrial laundries
- Cleaning companies

SMART TECHNOLOGY



Optimised energy consumption

IH180-240-280 only



Programmable control



Management software

COMPLETE WITH


- Complete stainless steel cabinet – IH-range
- Stainless steel drum and tub
- Aries Elite: fully programmable and multilingual
- Patented soap hopper
- Large drain valve (Ø76mm) – IH-range
- 2 large drain valves – IMB-range
- Large door opening for easy loading and unloading
- Automatic door positioning
- Liquid soap connection
- RS485 and USB-plug (IMB-range)
- Golden lock- patented inner door lock mechanism (IMB-range)



Hygienic solution



Large door opening



Easy operation



Low water consumption



Low energy consumption

OPTIONAL ENHANCEMENTS

- Complete stainless steel cabinet – IMB-range
- Liquid soap pumps
- Water sample tap
- Aries Assist
- Second display
- "Pullmann"- drum with 2 compartments



In this picture IMB360

| | IH180 | IH240 | IH280 |
|--------------------------------|--|----------------------------------|----------------------------------|
| INNERDRUM | | | |
| CAPACITY 10:1 | 18 kg | 24 kg | 28 kg |
| VOLUME | 180 L | 240 L | 280 L |
| DIAMETER | 750 mm | 750 mm | 750 mm |
| DRUM SPEED | | | |
| WASH | 42 rpm | 42 rpm | 42 rpm |
| EXTRACTION | 939 rpm | 939 rpm | 914 rpm |
| G-FACTOR | 370 | 370 | 350 |
| HEATING | | | |
| ELECTRICITY | 12 / 18 kW | 18 KW | 21,9 KW |
| STEAM | 3-8 bar | 3-8 bar | 3-8 bar |
| CONNECTIONS | | | |
| ELECTRICAL | STD: (C) 380-415/50/60/3 OPT-NC: (Q)200-240/50/60/3 - (X)200-240/50/60/1 only available for boiler fed and steam heating) - (P)380-415/50/60/3 - (N)440-480/50/60/3 | | |
| WATER INLET | STD: 3 x 3/4" - OPT-CN: 2 x 3/4" | STD: 3 x 3/4" - OPT-CN: 2 x 3/4" | STD: 3 x 3/4" - OPT-CN: 2 x 3/4" |
| STEAM INLET | 13 mm (1/2 in) | 13 mm (1/2 in) | 13 mm (1/2 in) |
| TRANSPORT DATA | | | |
| NET WEIGHT | 430 kg | 460 kg | 490 kg |
| MACHINE DIMENSIONS H X W X D | 1455 x 900 x 1145 mm | 1455 x 1020 x 1145 mm | 1455 x 1130 x 1145 mm |
| PACKAGING DIMENSIONS H X W X D | 1610 x 1010 x 1235 mm | 1610 x 1130 x 1235 mm | 1610 x 1240 x 1235 mm |

| | IMB360 | IMB500 | IMB700 |
|--------------------------------|--|-----------------------|-----------------------|
| INNERDRUM | | | |
| CAPACITY 10:1 | 36 kg | 50 kg | 70 kg |
| VOLUME | 360 L | 500 L | 700 L |
| DIAMETER | 775 mm | 775 mm | 775 mm |
| DRUM SPEED | | | |
| WASH | 41 rpm | 41 rpm | 41 rpm |
| EXTRACTION | 900 rpm | 900 rpm | 900 rpm |
| G-FACTOR | 350 | 350 | 350 |
| HEATING | | | |
| ELECTRICITY | 36 kW | 48 KW | 60 KW |
| STEAM | 3-8 bar | 3-8 bar | 3-8 bar |
| CONNECTIONS | | | |
| ELECTRICAL | 3 x 200-240V 50/60Hz 3 x 380-415V 50/60Hz 3 x 440-480V 50/60Hz | | |
| WATER INLET | 3 x 1" | 3 x 1" | 3 x 1" |
| STEAM INLET | 3/4" | 3/4" | 3/4" |
| TRANSPORT DATA | | | |
| NET WEIGHT | 960 kg | 1130 kg | 1310 kg |
| MACHINE DIMENSIONS H X W X D | 1700 x 1270 x 980 mm | 1700 x 1566 x 980 mm | 1700 x 2032 x 980 mm |
| PACKAGING DIMENSIONS H X W X D | 2005 x 1530 x 1255 mm | 2005 x 1830 x 1195 mm | 2005 x 2290 x 1195 mm |



In the battle against cross-contamination, the IPSO barrier washer-extractors meet the high European standards for good hygiene in industrial cleaning (RABC method EN14065). Your IPSO equipment maintains the quality of the linen and prevents infections within the laundry process.

BARRIER WASHERS

IB700 | IB900 | IB1100 | IB1400 | IB1800

The range of industrial hygienic barrier-washers are designed for healthcare environments. Their goal is to prevent microbiological contamination during the washing process, while combining performance, strength and energy-saving.

IDEAL FOR

- Hospitals
- Nursing Homes
- Industrial laundries
- Cleaning companies

SMART TECHNOLOGY



Management
software

COMPLETE WITH


- Freestanding, high spin
- Stainless steel cabinet (IB700-1800)
- Stainless steel drum and tub (IB700-1800)
- Oversized frame, bearings and drum
- Large drain valve
- Easy access to all parts
- Frequency controlled motor
- Large door opening for easy loading and unloading
- Micro graphic display with unlimited possibilities
- Perforated lifting ribs: better washing results, lower water consumption
- Eco-friendly washing programs
- Patented soap hopper dispenser with 5 removable compartments



Hygienic
solution



Large door
opening



Easy
operation

OPTIONAL ENHANCEMENTS

- Liquid soap pumps
- Drum with 2 pockets on IB1100,
with 3 pockets on IB700, IB900



In this picture IB700-1800

| | IB700 | IB900 | IB1100 |
|--------------------------------|---|---|---|
| INNERDRUM | | | |
| CAPACITY 10:1 | 70 kg | 90 kg | 110 kg |
| VOLUME | 700 L | 900 L | 1100 L |
| DIAMETER | 1000 mm | 1000 mm | 1100 mm |
| DRUM SPEED | | | |
| WASH | 36 rpm | 36 rpm | 35 rpm |
| EXTRACTION | 800 rpm | 800 rpm | 754 rpm |
| G-FACTOR | 360 | 360 | 350 |
| HEATING | | | |
| ELECTRICITY | 54 kW | 54 kW | 72 kW |
| STEAM | 6-8 bar | 6-8 bar | 6-8 bar |
| CONNECTIONS | | | |
| ELECTRICAL | 3 x 380-480 50/60Hz 3 x 200-240V 50/60Hz | 3 x 380-480 50/60Hz 3 x 200-240V 50/60Hz | 3 x 380-480 50/60Hz 3 x 200-240V 50/60Hz |
| WATER INLET | 3 x 1,5" + 1 x 3/4" | 3 x 1,5" + 1 x 3/4" | 3 x 1,5" + 1 x 3/4" |
| STEAM INLET | 1" | 1" | 19 mm (3/4 in) |
| TRANSPORT DATA | | | |
| NET WEIGHT | 2600 kg | 2810 kg | 2990 kg |
| MACHINE DIMENSIONS H X W X D | 1805 x 2025 x 1615 mm | 1805 x 2275 x 1615 mm | 1855 x 2325 x 1615 mm |
| PACKAGING DIMENSIONS H X W X D | 1985 x 2100 x 1740 mm | 1985 x 2355 x 1740 mm | 1985 x 2400 x 1740 mm |

| | IB1400 | IB1800 |
|--------------------------------|---|---|
| INNERDRUM | | |
| CAPACITY 10:1 | 140 kg | 180 kg |
| VOLUME | 1400 L | 1800 L |
| DIAMETER | 1200 mm | 1300 mm |
| DRUM SPEED | | |
| WASH | 33 rpm | 36 rpm |
| EXTRACTION | 720 rpm | 695 rpm |
| G-FACTOR | 350 | 350 |
| HEATING | | |
| ELECTRICITY | 72/96 kW | - |
| STEAM | 6-8 bar | 6-8 bar |
| CONNECTIONS | | |
| ELECTRICAL | 3 x 380-480 50/60Hz 3 x 200-240V 50/60Hz | 3 x 380-480 50/60Hz 3 x 200-240V 50/60Hz |
| WATER INLET | 3 x 1,5" + 1 x 3/4" | 3 x 1,5" + 1 x 1" |
| STEAM INLET | 1" | 1" |
| TRANSPORT DATA | | |
| NET WEIGHT | 3550 kg | 4990 kg |
| MACHINE DIMENSIONS H X W X D | 2075 x 2435 x 1805 mm | 2165 x 2585 x 1905 mm |
| PACKAGING DIMENSIONS H X W X D | 2250 x 2485 x 1940 mm | 2265 x 2665 x 2040 mm |



In the battle against cross-contamination, the IPSO barrier washer-extractors meet the high European standards for good hygiene in industrial cleaning (RABC method EN14065). Your IPSO equipment maintains the quality of the linen and prevents infections within the laundry process.

DR TUMBLE DRYERS

DR30 | DR35 | DR50 | DR55S | DR75 | DR120
DR170 | DR200 | STACK UNIT DR335 | DR445

IPSO's industrial tumble dryers feature a concentrated airflow pattern and sealed cylinder rims to ensure maximum air utilization and energy savings.

IDEAL FOR

- Hotels
- Restaurants
- Hospitals
- Nursing Homes
- Laundromats
- Industrial laundries
- Cleaning companies
- Spa & Wellness
- Sport clubs
- Campings
- Public sector institutions
- Apartment buildings
- Universities
- Marine
- Wet-cleaning

SMART TECHNOLOGY



Optimised energy consumption




Energy savings while drying



Integrated management platform

COMPLETE WITH

- Large door opening for easy loading and unloading
- Standard galvanized drum
- Unique drum supporting system
- Self-cleaning large lint filter for easy removal and efficient drying
- Axial airflow (DR30-35-55S)
- Radial airflow (DR50-75-120-170-200)
- Reversing: prevents linen from tangling
- Easy serviceability and diagnostics
- Control applications
 - EVO7S for vend applications
 - Dual Digital Control for OPL applications



Ergonomical construction



Large door opening



Low energy consumption

OPTIONAL ENHANCEMENTS

- Stainless steel front and drum
- Control OPL applications:
 - OPTimum Control:
 - 30 programmable cycles
 - 3 cycle types (Time Dry, Auto Dry, Moisture Dry)
- ECOdry
- CARE (Combustion Auto Response Equipped)
 - Prevents early laundry fire by constantly monitoring the temperature in the drum
 - In case of excessive temperature, linen is sprayed with water



In this picture DR30-35

| | DR30 | DR35 | DR55S |
|--------------------------------|------------------------|-------------------------|-------------------------|
| INNERDRUM | | | |
| CAPACITY 20:1 | 14 kg | 17 kg | 25 kg |
| CAPACITY 25:1 | 11 kg | 14 kg | 20 kg |
| DRUM VOLUME | 270 L | 350 L | 490 L |
| DRUM DIAMETER | 673 mm | 762 mm | 838 mm |
| POWER | | | |
| ELECTRIC HEATING (STD /ECODRY) | 21/12 kW | 24 /12 kW | 27 /18rpm |
| GAS HEATING (STD /ECODRY) | 73 000 / 55 000 BTU/h | 90 000 / 64 000 BTU/h | 112 000 / 105 000 BTU/h |
| GAS HEATING (STD /ECODRY) | 18 408 / 13 869 kcal | 22 695 / 16 139 kcal | 28 242 / 26 477 kcal |
| STEAM HEATING @ 6,9 BAR | 83 500 - 24,47 BTU -kW | 103 400 - 30,30 BTU -kW | - |
| TRANSPORT DATA | | | |
| NET WEIGHT | 145 (G/S) - 150 (E) | 155 (G/S) - 160 (E) | 195 (G) - 200 (E) |
| MACHINE DIMENSIONS H X W X D | 1625 x 710 x 1155 mm | 1625 x 800 x 1155 mm | 1700 x 875 x 1350 mm |
| PACKING DIMENSIONS H X W X D | 2210 x 880 x 1320 mm | 2210 x 950 x 1320 mm | 2210 x 1020 x 1520 mm |
| | | | |

| | DR50 | DR75 | DR120 | DR170 |
|--------------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------|
| INNERDRUM | | | | |
| CAPACITY 20:1 | 26 kg | 32 kg | 51 kg | 70 kg |
| CAPACITY 25:1 | 21 kg | 25 kg | 41 kg | 56 kg |
| DRUM VOLUME | 530 L | 634 L | 1020 L | 1410 L |
| DRUM DIAMETER | 940 mm | 940 mm | 1120 mm | 1290 mm |
| POWER | | | | |
| ELECTRIC HEATING (STD /ECODRY) | 30 kW | 36 / 21 kW | 60 kW | - |
| GAS HEATING (STD /ECODRY) | 130 00 BTU/h | 165 000 / 130 000BTU/h | 270 000 BTU/h | 395 000 BTU/h |
| GAS HEATING (STD /ECODRY) | 32 781 kcal | 41 607 / 32 781 kcal | 68 084 kcal | 99 605 kcal |
| STEAM HEATING @ 6,9 BAR | 113 600 - 33,29 BTU-kW | 133 900 - 39,24 BTU-kW | 187 500 - 54,95 BTU-kW | 265 500 - 77,81 BTU-kW |
| TRANSPORT DATA | | | | |
| NET WEIGHT | 295 (G) - 315 (S) - 310 (E) | 310 (G) - 325 (S) - 320 (E) | 555 (G) - 605 (S) - 565 (E) | 635 (G) - 705 (S) |
| MACHINE DIMENSIONS H X W X D | 1950 x 980 x 1190 mm | 1960 x 980 x 1350 mm | 2175 x 1170 x 1725 mm | 2390 x 1345 x 1775 mm |
| PACKING DIMENSIONS H X W X D | 2240 x 1170 x 1350 mm | 2240 x 1170 x 1500 mm | 2310 x 1350 x 1890 mm | 2550 x 1530 x 1950 mm |
| | | | | |

| | DR200 | DR335 STACK UNIT | DR445 STACK UNIT |
|--------------------------------|-------------------------|-----------------------------|-----------------------|
| INNERDRUM | | | |
| CAPACITY 20:1 | 83 kg | 2 x 15 kg | 2 x 21 kg |
| CAPACITY 25:1 | 66 kg | 2 x 12 kg | 2 x 16,8 kg |
| DRUM VOLUME | 1660 L | 300 L | 420 L |
| DRUM DIAMETER | 1290 mm | 762 mm | 838 mm |
| POWER | | | |
| ELECTRIC HEATING (STD /ECODRY) | - | 2 x 21 / 12 kW | - |
| GAS HEATING (STD /ECODRY) | 425 000 BTU/h | 73 000 / 55 000 BTU/h | 95 000 / 80 000 BTU/h |
| GAS HEATING (STD /ECODRY) | 107 170 kcal | 18 408 / 13 869 kcal | 23 956 / 20 173 kcal |
| STEAM HEATING @ 6,9 BAR | 265 500 - 77,81 BTU/-kW | 85 400 - 25,03 BTU/-kW | - |
| TRANSPORT DATA | | | |
| NET WEIGHT | 705 (G) - 770 (S) | 260 (G) - 275 (S) - 300 (E) | 320 |
| MACHINE DIMENSIONS H X W X D | 2390 x 1345 x 1965 mm | 1940 x 800 x 1090 mm | 2065 x 875 x 1235 mm |
| PACKING DIMENSIONS H X W X D | 1530 x 2140 x 2550 mm | 2210 x 900 x 1270 mm | 2210 x 1020 x 1520 mm |
| | | | |

I TUMBLE DRYERS

I190 | I250 | I285 | I345 | I530 | I680

IPSO's I-line of industrial tumblers combines a radial and axial airflow, resulting in a reduced energy consumption while maintaining outstanding drying performance.

IDEAL FOR

- Hotels
- Restaurants
- Hospitals
- Nursing Homes
- Industrial laundries
- Cleaning companies
- Spa & Wellness
- Sport clubs
- Campings
- Public sector institutions
- Apartment buildings
- Universities
- Marine
- Wet-cleaning

COMPLETE WITH

- Standard stainless steel drum with large diameter
- Easy-to-use microprocessor (ECT)
- Innovative bulged drum
- Combination of radial and axial airflow
 - maximal heat transfer
 - low energy consumption
 - short drying time
- Large door opening for easy loading and unloading



Ergonomical construction



Large door opening



Low energy consumption

OPTIONAL ENHANCEMENTS

- Reverse drum
- Full control programmer
- Residual moisture control
 - safe drying of delicate linen
 - humidity detection in %
 - ideal in combination with Softwash®
- Ideal for dry cleaners, fire departments
- available on Easy and Full Control
- Stainless steel front



In this picture I190-680

| | I190 | I250 | I285 |
|------------------------------|--|---|---|
| INNERDRUM | | | |
| CAPACITY 20:1 | 9 kg | 11 kg | 13 kg |
| DRUM VOLUME | 190 l | 250 l | 285 l |
| DRUM DIAMETER | Ø760 mm | Ø760 mm | Ø760 mm |
| POWER | | | |
| ELECTRIC HEATING | 3x380-415V 50/60Hz, 3x220-240V 50Hz, 3x208-240V 60Hz, 3x440V 60Hz, 3x480V 60Hz | 3x220-240V 50Hz, 3x380-415V 50Hz, 3x480V 60Hz | 3x220-240V 50Hz, 3x380-415V 50Hz, 3x480V 60Hz |
| GAS HEATING | 3x380-415V 50/60Hz, 3x220-240V 50Hz, 3x208-240V 60Hz, 3x440V 60Hz | 3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz | 3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz |
| STEAM HEATING | N/A | 3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz | 3x220-240V 50Hz, 1x220-240V, 3x380-415V 50Hz |
| TRANSPORT DATA | | | |
| NET WEIGHT | 170 kg | 230 kg | 250 kg |
| MACHINE DIMENSIONS H X W X D | 1465 x 795 x 815 mm | 1680 x 795 x 1070 mm | 1680 x 795 x 1240 mm |
| PACKING DIMENSIONS H X W X D | 1570 x 880 x 885 mm | 1785 x 855 x 1100 mm | 1785 x 855 x 1170 mm |
| | | | |

| | I345 | I530 | I680 |
|------------------------------|---|---|---|
| INNERDRUM | | | |
| CAPACITY 20:1 | 16 kg | 24 kg | 35 kg |
| DRUM VOLUME | 345 l | 530 l | 680 l |
| DRUM DIAMETER | Ø760 mm | Ø930 mm | Ø930 mm |
| POWER | | | |
| ELECTRIC HEATING | 3x220-240V 50Hz, 3x380-415V 50Hz, 3x480V 60Hz | 3x220-240V 60Hz, 3x380-415V 50Hz, 3x480V 60Hz | 3x220-240V 60Hz, 3x380-415V 50Hz, 3x480V 60Hz |
| GAS HEATING | 3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz | 3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz | 3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz |
| STEAM HEATING | 3x220-240V 50Hz, 1x220-240V, 3x380-415V 50Hz | 1x208V-240V 60Hz (3x380V-415V 50/60Hz) | 1x208V-240V 60Hz (3x380V-415V 50/60Hz) |
| TRANSPORT DATA | | | |
| NET WEIGHT | 250 kg | 275 kg | 305 kg |
| MACHINE DIMENSIONS H X W X D | 1680 x 795 x 1280 mm | 1975 x 965 x 1270 mm | 1975 x 965 x 1490 mm |
| PACKING DIMENSIONS H X W X D | 1785 x 855 x 1310 mm | 2075 x 1040 x 1320 mm | 2075 x 1040 x 1540 mm |
| | | | |

HEAT PUMP TUMBLERS*

[*check regional availability]

I195 | I195 HP

The I195-tumbler is an industrial, electric heated model with 9kg capacity and compact dimensions. Also available in heat-pump version.

IDEAL FOR


- Hotels
- Restaurants
- Spa & Wellness
- Sport clubs
- Campings
- Apartment buildings
- Universities
- Wet-cleaning

COMPLETE WITH

- Standard stainless steel drum
- Anthracite grey skin plate
- Black top panel
- Easy-to-use microprocessor (ECT)
- Innovative bulged drum
- Axial airflow
- 210° door opening for easy loading and unloading
- Intuitive control with simple selection and 3 programs

OPTIONAL ENHANCEMENTS

- Stainless steel front
- Reverse drum
- Residual moisture control
 - safe drying of delicate linen
 - humidity detection in %
- Heating power from 6 (kW) up to 12 (kW), to match various installation requirements

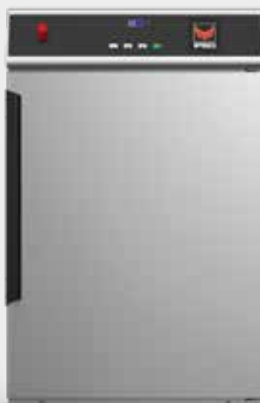

I195
(stainless steel version)



I195HP
(stainless steel version)

| | I195 | I195HP |
|------------------------------|---|--|
| INNERDRUM | | |
| CAPACITY 20:1 | 9 kg | 9 kg |
| DRUM VOLUME | 195 l | 195 l |
| DRUM DIAMETER | Ø670 mm | Ø670 mm |
| POWER | | |
| HEATING TYPE | ELECTRIC | HEAT PUMP |
| ELECTRIC HEATING | 3 x 220-230V - 60Hz 3 x 240V - 50Hz 3 x 380-415V + N - 50 Hz 3 x 380-415V + N - 60 Hz 3 x 380-415V - 50 Hz 3 x 380-415V - 60 Hz 3 x 440 V - 60 Hz | 3 x 220-240V - 50Hz 3 x 380-415V+N - 50Hz |
| TRANSPORT DATA | | |
| NET WEIGHT | 125 kg | 193 kg |
| MACHINE DIMENSIONS H X W X D | 1150 x 710 x 945 mm | 1725 x 710 x 925 mm |
| PACKING DIMENSIONS H X W X D | 1253 x 752 x 970 mm | 1815 x 752 x 970 mm |
| | | |

HEAT PUMP TUMBLERS

IHP190 | IHP250 | IHP285 | IHP345

The IHP-range includes 4 models of heat pump tumble-dryers. This range decreases energy consumption by more than 60% because the waste air is reduced. The machine has less heat loss so the laundry area is more comfortable to work in.

IDEAL FOR

- Hotels
- Restaurants
- Spa & Wellness
- Sport clubs
- Campings
- Apartment buildings
- Universities
- Wet-cleaning

COMPLETE WITH

- Standard stainless steel drum with large diameter
- Easy-to-use microprocessor
- Combination of radial and axial airflow concept
 - Maximal heat transfer
 - Low energy consumption
- Large door opening for easy loading and unloading
- Self-cleaning lint screen

OPTIONAL ENHANCEMENTS

- Coin operated version
- Reversing drum
- Full Control programmer
- Residual moisture control:
 - Safe drying of delicate linen
 - Humidity detection in %
 - Ideal in combination with wet cleaning
- Ideal for dry cleaner, fire departments
- Stainless steel front



In this picture IHP190-345

DRYING CABINETS

DC4 | DC8 (HP)

DC16 | FDC 6

Drying cabinets are a great complement to traditional tumble dryers in all types of laundry facilities, such as fire stations or multi-housing. Cabinets are perfect for drying garments that should not be tumble-dried.



In these pictures: DC4 (left) and FDC6 (right)

| | IHP190 | IHP250 | IHP285 | IHP345 |
|------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| INNERDRUM | | | | |
| CAPACITY 20:1 | 9,5 kg | 12,5 kg | 14,3 kg | 17,3 kg |
| CAPACITY 25:1 | 7,6 kg | 10 kg | 11,4 kg | 13,8 kg |
| DRUM VOLUME | 190 L | 250 L | 285 L | 345 L |
| DRUM DIAMETER | 760 mm | 760 mm | 760 mm | 760 mm |
| DRYING AVERAGE | 122 g/min | 126 g/min | 120 g/min | 120 g/min |
| MOTORS | | | | |
| FAN | 0,30 kW | 0,30 kW | 0,30 kW | 0,30 kW |
| DRIVE | 0,18 kW | 0,25 kW | 0,25 kW | 0,25 kW |
| HEAT PUMP | | | | |
| ELECTRICAL CONNECTION | 3 x 380-415V 50Hz+N (standard) | 3 x 380-415V 50Hz+N (standard) | 3 x 380-415V 50Hz+N (standard) | 3 x 380-415V 50Hz+N (standard) |
| ENERGY | 2,9 kW | 2,9 kW | 2,9 kW | 2,9 kW |
| PROGRAMMER | | | | |
| EASY CONTROL | standard | standard | standard | standard |
| FLEX CONTROL | optional | optional | optional | optional |
| TRANSPORT DATA | | | | |
| NET WEIGHT | 290 kg | 350 kg | 360 kg | 375 kg |
| MACHINE DIMENSIONS H X W X D | 1465 x 795 x 1275 mm | 1680 x 795 x 1525 mm | 1680 x 795 x 1615 mm | 1680 x 795 x 1735 mm |
| PACKING DIMENSIONS H X W X D | 1570 x 880 x 1335 mm | 1785 x 855 x 1540 mm | 1785 x 855 x 1635 mm | 1785 x 855 x 1750 mm |

| | DC4 | DC8 (HP) | DC16 | FDC6 |
|--------------------------------|------------------------|----------------------------|----------------------|----------------------|
| LOADING CAPACITY | up to 6 kg | 8 kg | 16 kg | 20 kg |
| DRYING CAPACITY | 25 (g/min)* | 62 (g/min)* | 81 (g/min)* | 6 overalls |
| HANGING LENGTH | 16 m | 16 m | 32 m | - |
| HEATING EFFECT | 2kW | 6 kW | 9 kW | 12 kW |
| TOTAL EFFECT | 2,038 kW | 6,3 kW | 9,45 kW | 12,45 kW |
| CONNECTIONS | | | | |
| STANDARD ELECTRICAL CONNECTION | 220-240/50/60Hz/1phase | 380-415V/50/60Hz/3phase +N | | |
| FUSE (A) | 10 | 10 | 16 | 20 |
| OUTLET EXHAUST | Ø100 mm | Ø125 mm | Ø160 mm | Ø160 mm |
| OUTLET AIRFLOW | 95 m³/h | 230 m³/h | 300 m³/h | 300 m³/h |
| TRANSPORT DATA | | | | |
| NET WEIGHT | 61 kg | 145 kg | 235 kg | 200 kg |
| MACHINE DIMENSIONS W X D X H | 595 x 610 x 1900 mm | 1200 x 640 x 1870 mm | 1800 x 800 x 1955 mm | 1800 x 800 x 1955 mm |

CYLINDER HEATED IRONERS

FCI 320 | FCI 500 | FCIF 500 | FCIR 500 | FCIFF 500 | FCI 800

The FCI range of industrial cylinder heated drying ironers features models with a roller diameter of 320 to 800 mm. These ironers allow a higher output and are therefore the perfect solution for more industrial on-premises applications.

FCI: Cylinder heated ironers

FCIR: Cylinder heated ironers with rear return

FCIF: Cylinder heated ironers with integrated length folder

FCIFF: Cylinder heated ironers with integrated length folder & feeding system

IDEAL FOR

- Hotels
- Restaurants
- Hospitals
- Nursing Homes
- Industrial laundries
- Spa & Wellness
- Sport clubs
- Campings
- Public sector institutions
- Marine

SMART TECHNOLOGY



Humidity control
& speed management system

COMPLETE WITH

- Large surface contact with linen over an angle of 300°
- High polished steel, thin cylinder
 - Reasonable price
 - Rapid response to temperature
 - Excellent thermal conductivity
- Automatic cooldown
- Easy to operate microprocessor
- Frequency controlled motor
- Indication of ironing speed and temperature
- Space-saving installation against the wall is possible: front return
- Electric or gas heating or steam heating
- Ergonomic design
- Easy to remove lint filters



High
output



Robust
design



Low energy
consumption

OPTIONAL ENHANCEMENTS

- Coin operated version
- Chrome-plated cylinder for better thermal conduction and ironing quality
- Foot pedal



In this picture FCI500

| | FCI320 | FCI500 | FCIF500 |
|---------------------------------|--|---|--|
| ROLLER DIAMETER | 320 mm | 502 mm | 502 mm |
| ROLLER LENGTH | 1600 mm | 2000 mm | 2600 mm |
| FINISHING WIDTH | 1664 / 2080 mm | 1600 / 3200 mm | 2000 / 2600 / 3200 mm |
| LINEN RETURN | | | |
| IRONING CAPACITY | 62-72 kg/h | 65-120 kg/h | 80-145 kg/h |
| SPEED | 1-6 m/min | 1,5-8 m/min | 1,5-8 m/min |
| HEATING | | | |
| ELECTRIC | 24,3 - - | 32,4-64,8 kW | 37,2-64,8 kW |
| GAS | - - 30 kW | 30-66 kW | 36-66 kW |
| STEAM | - | 36-88 kg/h | 49-88 kg/h |
| ELECTRIC CONNECTION | 3 x 480-415 V + N 50/60 Hz 3 x 208-240 V 50/60 Hz 3 x 380-415/440V 50/60 Hz | 3 x 480-415 V + N 50/60 Hz 3 x 208-240 V 50/60 Hz 3 x 380-415/440V 50/60 Hz | 3 x 208-240V 50/60Hz 3 x 380-415 + N 50-60Hz 3AC/380-415-N 50/60Hz 3AC/440V 60Hz |
| TRANSPORT DATA | | | |
| NET WEIGHT | 435 / 465 | 890 (E) - 920 (G) - 900 (S) 1020 (E) - 1150 (G) - 1070 (S) 1260 (E) - 1290 (G) - 1280 (S) 1470 (E) - 1590 (G) - 1540 (S) | 1150 (E)- 1290 (G) - 1200 (S) 1430 (E) - 1440 (G)- 1430 (S) 1590 (E) - 1680 (G) - 1620 (S) |
| MACHINE DIMENSIONS H X W X D | 1110 x 2084 x 765 mm 1110 x 2500 x 765 mm 1110 x 2084 x 765 mm 1110 x 2500 x 765 mm | 1232 x 2350 x 1052 mm 1232 x 2750 x 1052 mm 1232 x 3350 x 1087 mm 1232 x 3950 x 1087 mm | 1568 x 2750 x 1620 mm 1568 x 3350 x 1620 mm 1568 x 3950 x 1620 mm |
| PACKING DIMENSIONS H X W X D | 1260 x 2190 x 765 mm 1260 x 2610 x 800 mm 1260 x 2190 x 800 mm 1260 x 2610 x 800 mm | 1550 x 2485 x 1095 mm 1550 x 2885 x 1095 mm 1550 x 3485 x 1095 mm 1550 x 4085 x 1095 mm | 1890 x 2885 x 1290 mm 1890 x 3485 x 1290 mm 1890 x 4085 x 1290 mm |
| | | | |

| | FCIR500 | FCIFF500 | FCI800 |
|---------------------------------|--|--|--|
| ROLLER DIAMETER | 502 mm | - | 807 mm |
| ROLLER LENGTH | 2600 mm | 2600 mm | 3200 mm |
| FINISHING WIDTH | 2000 / 2600 / 3200 mm | 2000 / 2600 / 3200 mm | 3186 mm |
| LINEN RETURN | | | |
| IRONING CAPACITY | 80-145 kg/h | 80-145 kg/h | 195 kg/h |
| SPEED | 1,5-8 m/min | - | 3-15 m/min |
| HEATING | | | |
| ELECTRIC | 37,2-64,8 kW | 37,2-64,8 kW | 75 kW |
| GAS | 36-66 kW | 36-66 kW | 110 kW |
| STEAM | 49-88 kg/h | 49-88 kg/h | 190 kg/h |
| ELECTRIC CONNECTION | 3 x 208-240V 50/60Hz 3 x 380-415 + N 50-60Hz 3AC/380-415-N 50/60Hz 3AC/440V 60Hz | 208-240V 50-60Hz/3 380-415V+N 50-60Hz/3 3AC/380-415-N 50/60Hz 3AC/440V 60Hz | 3AC/380-415 + N 50/60Hz 3A/380-415-N 50/60Hz 3AC/440V 60Hz 3AC/208-240V 50/60Hz |
| TRANSPORT DATA | | | |
| NET WEIGHT | 1090 (E) - 1230 (G) - 1140 (S) 1350 (E) - 1380 (G) - 1350 (S) 1490 (E) - 1580 (G) - 1520 (S) | 1690 (E) - 1700 (G) - 1720 (S) 2060 (E) - 2180 (G) - 2100 (S) 2360 (E) - 2400 (G) - 2380 (S) | 2610 (E) - 2480 (G) - 2900 (S) |
| MACHINE DIMENSIONS H X W X D | 1568 x 2750 x 1528 mm 1568 x 3350 x 1528 mm 1568 x 3950 x 1528 mm | | 1985 x 4260 x 1915 mm |
| PACKING DIMENSIONS H X W X D | 1890 x 2885 x 1290 mm 1890 x 3485 x 1290 mm 1890 x 4085 x 1290 mm | 1990 x 2990 x 1370 mm 1990 x 3590 x 1370 mm 1990 x 4190 x 1370 mm | 2075 x 4330 x 1940 mm |
| | | | |

CYLINDER HEATED IRONERS

I25 | I30

The I-range of industrial ironers is very suitable for smaller on-premises applications thanks to its reduced dimensions and user-friendly operation. This range of ironers offers an excellent ironing quality for all fabric types, including the most complex to treat such as linen or embroidered table cloths.

IDEAL FOR

- Hotels
- Restaurants
- Hospitals
- Nursing Homes
- Spa & Wellness
- Sport clubs
- Campings
- Public sector institutions
- Marine

COMPLETE WITH

- Homogeneous ironing pressure to ensure top ironing quality
- PID controlled temperature regulation offering better temperature distribution and reduced energy consumption
- Long-life heating elements
- All vital components are easily accessible
- Start/stop pedal
- Backside of the basin is insulated with 25mm ceramic wool – no energy waste

OPTIONAL ENHANCEMENTS

- Frequency inverter enabling variable ironing speed
- Fan exhaust removing humid air from the ironer (I25-140, I30-160, I30-200)



In this picture I25

| | I25-100 | I25-120 | I25-140 |
|------------------------------|---|---|---|
| ROLLER DIAMETER | 250 mm | 250 mm | 250 mm |
| USEFUL ROLLER LENGTH | 1000 mm | 1200 mm | 1400 mm |
| SPEED | 3,9 (2-4 optional variable speed) m/min | 3,9 (2-4 optional variable speed) m/min | 3,9 (2-4 optional variable speed) m/min |
| CAPACITY | 30 kg/h | 35 kg/h | 40 kg/h |
| HEATING | | | |
| ELECTRICITY | 5 kW | 6 kW | 7 kW |
| MOTOR | | | |
| POWER | 5,2 kW | 6,2 kW | 7,2 kW |
| TRANSPORT DATA | | | |
| GROSS WEIGHT | 119 kg | 130 kg | 154 kg |
| NET WEIGHT | 110 kg | 118 kg | 135 kg |
| MACHINE DIMENSIONS H X W X D | 1005 x 1400 x 420 mm | 1005 x 1600 x 420 mm | 1005 x 1800 x 420 mm |
| PACKING DIMENSIONS H X W X D | 1150 x 1480 x 500 mm | 1150 x 1680 x 500 mm | 1150 x 1880 x 500 mm |
| | | | |

| | I30-160 | I30-200AV |
|------------------------------|---|----------------------|
| ROLLER DIAMETER | 290 mm | 290 mm |
| USEFUL ROLLER LENGTH | 1600 mm | 2000 mm |
| SPEED | 3,9 (2-4 optional variable speed) m/min | 2-4 m/min |
| CAPACITY | 32-50 kg/h | 52-79 kg/h |
| HEATING | | |
| ELECTRICITY | 13,2 kW | 16,8 kW |
| MOTOR | | |
| POWER | 13,7 kW | 17,5 kW |
| TRANSPORT DATA | | |
| GROSS WEIGHT | 300 kg | 350 kg |
| NET WEIGHT | 262 kg | 294 kg |
| MACHINE DIMENSIONS H X W X D | 1100 x 2200 x 500 mm | 1100 x 2600 x 500 mm |
| PACKING DIMENSIONS H X W X D | 1260 x 2280 x 590 mm | 1260 x 2690 x 590 mm |
| | | |

CHEST HEATED IRONERS 1 ROLL

ACL 80K | ACL 370 | ACL 500 | ACL 600 | ACL 800 | ACL 80K

The chest heated ironers meet the highest industrial ironing needs. One single person can operate an ironers which allows to save on labour cost. For the complementary feeder and folders, see page 30-31.

IDEAL FOR

- Hospitals
- Nursing Homes
- Industrial laundries
- Public sector institutions

COMPLETE WITH

CHEST

- One piece super flexible laser welding chest
- Self-adjusted chest applies pressure always equally over entire width and length of the roll that makes linen being ironed equal quality
- Chest heated by circulated thermal oil moving in inside the chests. It makes the temperature even along full chest width. No trouble of overheated spots.
- Self-contained thermal oil heating and circulation system offers accurate temperature control, easy installation and start up.

ROLL

- Perforated steel roll with under springing and 800 gr/m² padding
- Suction through the roll to ventilate moisture
- Fully enclosed planetary gearbox mounted directly onto the roll
- Variable speed by frequency inverter drive Control ACL80K
- Standard 7.5" touch screen with 50 programs
- Speed regulation and modulating burner included. Control ACL370 – 500 – 600 – 800
- Simple readout control to set temperature and speed manually



High
output



Robust
design



Low energy
consumption

OPTIONAL ENHANCEMENTS

- Foot pedal for easy stop and start
- Perforated vacuum feeding bands for easy feeding linen (ACL80K)
- Higher ironing speeds (ACL370-800)
- Longer feeding table (ACL370-800)



In this picture ACL80K

| | ACL370 | | | | | ACL500 | | | | | | ACL600 | | | | | | |
|--|--------|------|------|------|------|----------------------------|------|------|------|------|------|---------|------|------|------|------|------|--|
| | 17 | 20 | 22 | 25 | 30 | 17 | 20 | 22 | 25 | 30 | 33 | 17 | 20 | 22 | 25 | 30 | 33 | |
| ROLL DIAMETER (MM) | 370 | | | | | 500 | | | | | | 600 | | | | | | |
| WORKING WIDTH (MM) | 1750 | 2000 | 2200 | 2500 | 3000 | 1750 | 2000 | 2200 | 2500 | 3000 | 3300 | 1750 | 2000 | 2200 | 2500 | 3000 | 3300 | |
| IRONING SPEED (MM) | 1-6,5 | | | | | 1,5-5,5 (1,5-12 optional) | | | | | | 1,5-6,5 | | | | | | |
| IRONING CAPACITY - ELECTRIC AND GAS HEATING (KG/HR) | 48 | 54 | 60 | 67 | 81 | 65 | 75 | 82 | 95 | 115 | 125 | 100 | 109 | 126 | 140 | 160 | 175 | |
| IRONING CAPACITY - STEAM HEATING (KG/HR) | - | | | | | 58 | 67 | 74 | 85 | 103 | 112 | 90 | 98 | 113 | 126 | 144 | 157 | |
| GAS HEATING | | | | | | | | | | | | | | | | | | |
| GAS CONNECTION (INCH) | 1/2 | | | | | | | | | | | 3/4 | | | | | | |
| ELECTRIC HEATING | | | | | | | | | | | | | | | | | | |
| HEATING ELEMENT (KW) | 30 | | 35 | | 40 | 30 | 30 | 35 | 40 | 45 | | | | 50 | | 60 | 75 | |
| STEAM HEATING | | | | | | | | | | | | | | | | | | |
| STEAM PRESSURE (BAR) | - | | | | | 6-12 | | | | | | | | | | | | |
| STEAM CONNECTION (INCH) | - | | | | | 5/4 | | | | | | | | | | | | |
| STEAM CONSUMPTION @10 BAR (KG) | - | | | | | 50 | 57 | 63 | 72 | 88 | 95 | 77 | 83 | 96 | 107 | 123 | 134 | |
| TRANSPORT DATA | | | | | | | | | | | | | | | | | | |
| GROSS WEIGHT (KG) | 730 | 812 | 892 | 1013 | 1233 | 1030 | 1230 | 1300 | 1380 | 1505 | 1630 | 1830 | 2030 | 2230 | 2430 | 2630 | 2930 | |
| NET WEIGHT (KG) | 700 | 782 | 862 | 983 | 1203 | 1000 | 1200 | 1270 | 1350 | 1475 | 1600 | 1800 | 2000 | 2200 | 2400 | 2600 | 2900 | |
| MACHINE DIMENSIONS H X W X D (MM) | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1395 | 1395 | 1395 | 1395 | 1395 | 1395 | |
| | 2474 | 2724 | 2924 | 3224 | 3724 | 2600 | 2850 | 3050 | 3350 | 3850 | 4150 | 2725 | 2975 | 3175 | 3475 | 3975 | 4275 | |
| | 1520 | 1520 | 1520 | 1520 | 1520 | 1715 | 1715 | 1715 | 1715 | 1715 | 1715 | 1900 | 1900 | 1900 | 1900 | 1900 | 1900 | |
| PACKING DIMENSIONS H X W X D (MM) | 1300 | 1300 | 1300 | 1300 | 1300 | 1300 | 1300 | 1300 | 1300 | 1300 | 1300 | 1495 | 1495 | 1495 | 1495 | 1495 | 1495 | |
| | 2574 | 2824 | 3024 | 3224 | 3824 | 2700 | 2950 | 3150 | 3450 | 3950 | 4250 | 2825 | 3075 | 3275 | 3575 | 4075 | 4375 | |
| | 1050 | 1050 | 1050 | 1050 | 1050 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1595 | 1595 | 1595 | 1595 | 1595 | 1595 | |

| | ACL800 | | | | | | ACL80K | | | |
|--|--------|------|------|------|------|------|--------|------|------|------|
| | 17 | 20 | 22 | 25 | 30 | 33 | 25 | 30 | 33 | 35 |
| ROLL DIAMETER (MM) | 800 | | | | | | | | | |
| WORKING WIDTH (MM) | 1750 | 2000 | 2200 | 2500 | 3000 | 3300 | 2500 | 3000 | 3300 | 3500 |
| IRONING SPEED (MM) | 3-12 | | | | | | 9-36 | | | |
| IRONING CAPACITY - ELECTRIC AND GAS HEATING (KG/HR) | 152 | 164 | 186 | 200 | 230 | 250 | 308 | 370 | 405 | 430 |
| IRONING CAPACITY - STEAM HEATING (KG/HR) | 136 | 147 | 167 | 180 | 207 | 225 | - | | | |
| GAS HEATING | | | | | | | | | | |
| GAS CONNECTION (INCH) | 3/4 | | | | | | 5/4 | | | |
| ELECTRIC HEATING | | | | | | | | | | |
| HEATING ELEMENT (KW) | 60 | | | 75 | 90 | | 100 | 120 | 150 | 165 |
| STEAM HEATING | | | | | | | | | | |
| STEAM PRESSURE (BAR) | 6-12 | | | | | | - | | | |
| STEAM CONNECTION (INCH) | 5/4 | | | | | | - | | | |
| STEAM CONSUMPTION @10 BAR (KG) | 98 | 113 | 123 | 140 | 169 | 186 | - | | | |
| TRANSPORT DATA | | | | | | | | | | |
| GROSS WEIGHT (KG) | 2030 | 2230 | 2630 | 2830 | 3130 | 3430 | 2800 | 3100 | 3250 | 3450 |
| NET WEIGHT (KG) | 2000 | 2200 | 2600 | 2800 | 3100 | 3400 | n/a | | | |
| MACHINE DIMENSIONS H X W X D (MM) | 1415 | 1415 | 1415 | 1415 | 1415 | 1415 | 1655 | 1655 | 1655 | 1655 |
| | 2910 | 3160 | 3360 | 3660 | 4160 | 4460 | 3735 | 4235 | 4535 | 4735 |
| | 2035 | 2035 | 2035 | 2035 | 2035 | 2035 | 1820 | 1820 | 1820 | 1820 |
| PACKING DIMENSIONS H X W X D (MM) | 1515 | 1515 | 1515 | 1515 | 1515 | 1515 | 1800 | 1800 | 1800 | 1800 |
| | 3010 | 3260 | 3460 | 3760 | 4260 | 4560 | 3800 | 4300 | 4600 | 4800 |
| | 1755 | 1755 | 1755 | 1755 | 1755 | 1755 | 2300 | 2300 | 2300 | 2300 |

CHEST HEATED IRONERS 2 ROLLS

ACL 80K | ACL 800

The chest heated ironers meet the highest industrial ironing needs. One single person can operate an ironers which allows to save on labour cost. For the complementary feeder and folders, see page 30-31.

IDEAL FOR

- Hospitals
- Nursing Homes
- Industrial laundries
- Public sector institutions

COMPLETE WITH

CHEST

- One piece super flexible laser welding chest
- Self-adjusted chest applies pressure always equally over entire width and length of the roll that makes linen being ironed equal quality
- Chest heated by circulated thermal oil moving in inside the chests. It makes the temperature even along full chest width. No trouble of overheated spots.
- Self-contained thermal oil heating and circulation system offers accurate temperature control, easy installation and start up.
- ACL80K has a unique higher ironing capacity of the second roll
 - One piece super flexible chest with 278°, 4/3 wrap up the roll for optimal ironing contact
 - The unique ventilation of the chest improves efficiency up to 25% capacity

ROLL

- Perforated steel roll with under springing and polyester felt 800 gr/m² padding
- Suction through the roll to ventilate moisture
- Fully enclosed planetary gearbox mounted directly onto the roll
- Variable speed by frequency inverter drive
- Ironing speed up to 20m/min, optional to high speed to 36m/min

CONTROL

- Standard 7.5" touch screen with 50 programs
- Speed regulation and modulating burner included.

OPTIONAL ENHANCEMENTS

- Foot pedal for easy stop and start
- Perforated vacuum feeding bands for easy feeding linen
- Higher ironing speeds
- Delivery table for direct picking linen from ironer
- Unique high ventilation chest for first roll
- Meta Aramid padding



In this picture ACL800 - 2 rolls

| | ACL80K | | | | ACL800 | | | |
|--|-------------------------|-----------|-----------|-----------|------------|-----------|-----------|-----------|
| | 25 | 30 | 33 | 35 | 25 | 30 | 33 | 35 |
| MODELS | 800 mm | | | | | | | |
| ROLL DIAMETER | 2500 mm | 3000 mm | 3300 mm | 3500 mm | 2500 mm | 3000 mm | 3300 mm | 3500 mm |
| WORKING WIDTH | 5-20 (9-36 optional) mm | | | | | | | |
| IRONING SPEED | 515 kg/hr | 615 kg/hr | 670 kg/hr | 710 kg/hr | 439 kg/hr | 490 kg/hr | 530 kg/hr | 565 kg/hr |
| IRONING CAPACITY - ELECTRIC AND GAS HEATING | - | | | | 370 kg/hr | 430 kg/hr | 475 kg/hr | 510 kg/hr |
| IRONING CAPACITY - STEAM HEATING | | | | | | | | |
| GAS HEATING | 2 x 5/4 | | | | | | | |
| GAS CONNECTION | | | | | | | | |
| ELECTRIC HEATING | 165 kW | 200 kW | 210 kW | 240 kW | 150 kW | 180 kW | 80 kW | 200 kW |
| HEATING ELEMENT | | | | | | | | |
| STEAM HEATING | - | | | | 1 1/2 inch | | | |
| STEAM INLET | | | | | | | | |
| TRANSPORT DATA | | | | | | | | |
| GROSS WEIGHT | 5700 kg | 6100 kg | 6350 kg | 6500 kg | 5400 kg | 5800 kg | 6100 kg | 6400 kg |
| MACHINE DIMENSIONS H X W X D (MM) | 1900 | 1900 | 1900 | 1900 | 1850 | 1850 | 1850 | 1850 |
| | 3660 | 4160 | 4460 | 4660 | 3660 | 4160 | 4460 | 4660 |
| | 3110 | 3110 | 3110 | 3110 | 2790 | 2790 | 2790 | 2790 |
| PACKING DIMENSIONS H X W X D ROLL 1 (MM) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |
| | 3800 | 4300 | 4600 | 4800 | 3800 | 4300 | 4600 | 4800 |
| | 1900 | 1900 | 1900 | 1900 | 1900 | 1900 | 1900 | 1900 |
| PACKING DIMENSIONS H X W X D ROLL 2 (MM) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |
| | 3800 | 4300 | 4600 | 4800 | 3800 | 4300 | 4600 | 4800 |
| | 1700 | 1700 | 1700 | 1700 | 1700 | 1700 | 1700 | 1700 |

FEEDERS

VACUUM FEEDER AVFV AUTOMATIC FEEDER AAFV

FEEDER AVFV 30-35

- For manual feeding of sheets, duvets, table linen and small pieces in one or multiple lanes
- Suction under the feeding belts to ensure the leading edge is held in position
- Central dust collecting system
- Adjustable speed regulation from 8 to 40m/min
- Number of lander and feeding positions standard 1 to 6



FEEDER AAFV 30-35

- Single lane automatic one station feeder
- For feeding linen of manual feeding in multiple lanes
- Two operators can feed into the one clipping station and achieve a production of +- 500 pcs/hr.
- Heavy duty steel construction
- Movable collecting bags to store small linen
- Central dust collecting system



| WORKING WIDTH ,MAX CONNECTIONS ELECTRIC MAIN POWER TRANSPORT DATA GROSS WEIGHT NET WEIGHT MACHINE DIMENSIONS H X W X D PACKING DIMENSIONS H X W X D | Vacuum feeder AVFV | | | Automatic feeder AAFV | | |
|---|----------------------|---------|-----------------------|-----------------------|---------|-----------------------|
| | 30 | 33 | 35 | 30 | 33 | 35 |
| | 3000 mm | 3300 mm | 3500 mm | 3000 mm | 3300 mm | 3500 mm |
| | 4,34 - 11A kW | | | 3,5 - 8,6A kW | | |
| | 400-50/60/3 | | | | | |
| | 1850 kg | 1850 kg | 2150 kg | 1050 kg | 1050 kg | 1150 kg |
| | 1800 kg | 1800 kg | 2100 kg | 1000 kg | 1000 kg | 1100 kg |
| | 4030 x 1650 x 1600mm | | 4230 x 1650 x 1600 mm | 4030 x 1650 x 1480 mm | | 4230 x 1650 x 1480 mm |
| | 4030 x 1650 x 1600mm | | 4230 x 1650 x 1600 mm | 4030 x 1650 x 1480 mm | | 4230 x 1650 x 1480 mm |
| | | | | | | |

FOLDERS

ASFV 30-35 | ATFV C3 | ATFV MF

FOLDER ASFV 30-35

- For bed sheets, duvets, tablecloths and large sheets
- High speed folder with single lane sheets making 2 lateral folds combined with 3 cross folds and stacking by a drop stacker
- Standard max. length on multi-lane is 1200 mm
- Stacker can be positioned on right or left, to fit your laundry flow



FOLDER ATFV C3

- Automatic folder for different types of towels and dry work
- Machine is available in several executions
- Cross fold is combined with stacking and return to operator
- Working width: 1100mm, maximum length: 2400mm
- Four wheels underneath to easily move the folder



FOLDER ATFV MF

- Advanced folding, sorting and stacking machine for a large variety of towels or dry articles.
- Machine is available in several executions
- Central conveyor left or right coming back to the operator or backwards to fit your laundry flow needs
- Fixed speed 52m/min

| | ATFV-MF | ATFV-C3 |
|------------------------------|-----------------------|-----------------------|
| WORKING WIDTH, MAX | 1000 mm | 1200 mm |
| WORKING LENGTH, MAX | 1800 mm | 2400 mm |
| CONNECTIONS | | |
| ELECTRIC | 3,5 - 8,5A | 2,5 - 6A |
| MAIN POWER | 400/50/60/3 | 400/50/60/3 |
| TRANSPORT DATA | | |
| GROSS WEIGHT | 1400 kg | 850 kg |
| NET WEIGHT | 1320 kg | 800 kg |
| MACHINE DIMENSIONS H X W X D | 1360 X 2050 X 4580 mm | 1700 x 1600 x 3000 mm |
| PACKING DIMENSIONS H X W X D | 1900 X 1550 X 3950 mm | 1750 x 1600 x 3000 mm |

| | ASFV 30 | ASFV 33 | ASFV 35 |
|------------------------------|-----------------------|---------|-----------------------|
| WORKING WIDTH ,MAX | 3000 mm | 3300 mm | 3500 mm |
| CONNECTIONS | | | |
| ELECTRIC | 4,5 - 11A | | |
| MAIN POWER | 400/50/60/3 | | |
| TRANSPORT DATA | | | |
| GROSS WEIGHT | 1750 kg | | 2050 kg |
| NET WEIGHT | 1700 kg | | 2000 kg |
| MACHINE DIMENSIONS H X W X D | 1800 x 4700 x 4100 mm | | 1800 x 4900 x 4100 mm |
| PACKING DIMENSIONS H X W X D | 2200 x 4700 x 1900 mm | | 2200 x 4900 x 1900 mm |

SEMI-COMMERCIAL UNITS

CW10 | CD10 | CS10

The CW10-washers are highly efficient, reducing operating costs through low water usage. A 1,200 RPM spin speed increases overall laundry efficiency by removing more moisture from loads.

The CD10-dryers are designed with a large door opening, the largest in the industry on this type of equipment, providing easy loading and unloading.

The range of CS10-stack washer/dryers has been designed as vertical combinations that provide all of the power of IPSO washers and dryers while occupying only half of the floor space of a conventional washer and dryer setup.

IDEAL FOR

- Hotels
- Restaurants
- Hospitals
- Nursing Homes
- Laundromats
- Spa & Wellness
- Sport clubs
- Campings
- Public sector institutions
- Apartment buildings
- Universities
- Marine
- Wet-cleaning

CW10 WASHER-EXTRACTOR

- Stainless steel outer and inner drum
- Freestanding: can be installed at any floor and any level
- Top, front and side panels standard available in white
- Door opens 180° for easy loading and unloading
- Standard drain pump
- Redesigned soap box with four compartments
- 440 G-force extraction
 - Removes more moisture
 - Minimizes drying times and utility costs
- 6 wash programs including possibility of programming cycle modifier options
 - Added prewash
 - Extra wash time
 - Extra rinse

CD10 DRYER

- Galvanized steel cylinder
- Top, front and side panels standard available in white
- Door opens 180° for easy loading and unloading
- Oversized lint filter located in front for easy cleaning
- Noiseless exhaust blower assures short drying time and low operating cost
- 5 drying programs



| | CW10 | | |
|--------------------------|--|--|--|
| MODEL NUMBER | BF3JLBSP403UN06 - BF3JLBSP403UW06 - BF3JLBSC403UN06 - BF3JLBSC403UW06 | BF3JXASP403UN06 - BF3JXASP403UW06 - BF3JXASC403UN06 | BF3JCBSP403UN06 - BF3JCBSP403UW06 - BF3JCBSC403UN06 - BF3JCBSC403UW06 - BF3JCBSC403UN06 - BF3JCBSC403UW06 - BF3JCBSC403UN06 - BF3JCBSC403UW06 |
| CONTROL | EVO7S | | |
| CONTROL LOCATION | 45° front control | 10° front control | 45° front control |
| ACTUATION | Prep for central pay | Prep for coin | OPL |
| HEATING | | | |
| ELECTRICITY | 4,8 kW | | |
| DRUM | | | |
| CAPACITY | 9,5 kg | | |
| VOLUME | 96,8 L | | |
| DRUM SPEED | | | |
| G-FORCE | 440 | | |
| EXTRACTION | 1200 rpm | | |
| MOTOR | | | |
| MOTOR POWER | 0,67 kW | | |
| CONNECTIONS | | | |
| WATER INLET | 0,75 in | | |
| WATER PRESSURE | 20-120 bar | | |
| ELECTRICAL CONNECTION | 400/50/3N (conversion to 230/50/3 possible) | | |
| TRANSPORT DATA | | | |
| NET WEIGHT | 118 kg | | |
| MACHINE DIMENSIONS HXWXD | 1027 X 683 X 704 mm | | |
| PACKING DIMENSIONS HXWXD | 1130 x 762 x 864 mm | | |

| | | | | | |
|------------------------------|---|-------------------|------------------------------------|------------------------------------|----------------------|
| | CD10 | | | | |
| MODEL NUMBER | BD3NGBS5403UN01 BD3NGBGS403UW01 | BDGNGBGS303EW01 | BD3NXAGS403UW01 BDGNCAGS303EW01 | BD3NLBS5403UN01 BD3NLBGS403UW01 | BDGNLBGS303EW01 |
| CONTROL | EVO7S | | | | |
| CONTROL LOCATION | 45° front control | 45° front control | 10° front control | 45° front control | 45° front control |
| ACTUATION | OPL - Electric | OPL - Gas | Prep for coin | Prep for central pay | Prep for central pay |
| HEATING | | | | | |
| ELECTRICITY | 4,5 kW | n/a | 4,5 kW | 4,5 kW | n/a |
| GAS | n/a | 20 000 BTU | n/a | n/a | n/a |
| DRUM | | | | | |
| CAPACITY | 8,2 kg | | | | |
| VOLUME | 198 L | | | | |
| MOTOR | | | | | |
| POWER | 0,25 kW | | | | |
| CONNECTIONS | | | | | |
| GAS INLET | n/a | 9,5 mm | n/a | | n/a |
| EXHAUST OUTLET DIAMETER | 102 mm | | | | |
| EXHAUST AIRFLOW | 105 L/sec | | | | |
| ELECTRICAL CONNECTION | 400/50/3N (conversion to 230/50/3 possible) | | | 220-240/50/1 | |
| TRANSPORT DATA | | | | | |
| NET WEIGHT | 68 kg | | | | |
| MACHINE DIMENSIONS HXWXD | 1027 x 683 x 711 mm | | | | |
| PACKING DIMENSIONS H X W X D | 1156 x 737 x 832 mm | | | | |

| | CS10 | | |
|------------------------------|---|---|---|
| MODEL NUMBER | BT3JLASP403UN06 BT3JLASP403UW06 BT3JLASC403UW06 | BT3JXASP403UN06 BT3JXASP403UW06 BT3JXASC403UW06 | BT3JCASP403UN06 - BT3JGA3P403UN06 - BT3J- CASP403UW06 - BT3JGA3P403UW06 - BT3JCASC403UW06 - BT3JGA3C403UW06 |
| CONTROL | EVO7S | | |
| CONTROL LOCATION | 10° front control | | |
| ACTUATION | Prep for central pay | Prep for coin | OPL |
| HEATING | | | |
| ELECTRICITY | washer: 3 ph / dryer 3ph | | |
| DRUM | | | |
| CAPACITY | Washer: 9,5 kg / Dryer 8,2 kg | | |
| VOLUME | Washer: 96,8 L / Dryer : 198 L | | |
| MOTOR | | | |
| POWER | Washer : 0,67- Dryer 0,25 | | |
| CONNECTIONS | | | |
| EXHAUST OUTLET DIAMETER | 102 mm | | |
| EXHAUST AIRFLOW | 105 L/sec | | |
| WATER INLET | 0,75 " | | |
| WATER PRESSURE | 20-120 | | |
| ELECTRICAL CONNECTION | 400/50/3N (conversion to 230/50/3 possible) | | |
| TRANSPORT DATA | | | |
| NET WEIGHT | 175 kg | | |
| MACHINE DIMENSIONS HXWXD | 1986 x 683 x 704 mm | | |
| PACKING DIMENSIONS H X W X D | 2032 x 762 x 864 mm | | |

SEMI-COMMERCIAL WASHER

SC65

The SC65 semi-commercial washer has a capacity of 6,5 KG and is designed for small spaces.

IDEAL FOR

- Apartments
- Spa & Wellness
- Sport clubs
- Marine

COMPLETE WITH

- Grey cabinet
- Stainless steel drum and tub
- Easy to use timer
- Mop and medical programs
- Soap hopper at the front
- Matching dryer available – space saving when placed on top



Compact design



Stackable unit



Low energy consumption

OPTIONAL ENHANCEMENTS

- Marine voltages available
- Drain valve
- External coin meter
- Liquid soap pumps



| | |
|------------------------------|--|
| | SC65 |
| CAPACITY | 6,5 kg |
| VOLUME | 60 L |
| DIAMETER | 480 mm |
| HEATING | Electric |
| EXTRACTION | 1400 rpm |
| G-FACTOR | 530 |
| ELECTRICAL CONNECTION | With drainpump: 208-240V/60/1 380-415V/50/3Ph+N (available with drain valve) 440V/60/3Ph-N 380-415V/50/3Ph-N |
| ELECTRICAL HEATING | 3,2 Kw |
| NET WEIGHT | 73 kg |
| MACHINE DIMENSIONS H X W X D | 850 X 595 X 585 mm |
| PACKING DIMENSIONS H X W X D | 915 X 610 X 660 mm |

SEMI-COMMERCIAL DRYERS

DAM6 | DAMC6 | DAM6HP

The semi-commercial dryers are designed for small spaces, with a limited capacity of 6,5 KG. The executions vary from vented to condens and heat pump dryer.

IDEAL FOR

- Apartments
- Spa & Wellness
- Sport clubs
- Marine

COMPLETE WITH

- Grey cabinet
- Stainless steel drum
- Large door opening (Ø45cm)



Compact design



Stackable unit



Low energy consumption

OPTIONAL ENHANCEMENTS

- External coin meter
- Condens unit (DAMC6)
- Heat pump heating (DAM6 HP)
- Marine voltages available



| | DAM6 Vented dryer | DAMC6 Condens dryer | DAM6 HP Heat pump dryer |
|------------------------------|--|------------------------|----------------------------|
| CAPACITY | 6,5 kg | 6,5 kg | 6,5 kg |
| VOLUME | 112 L | 112 L | 112 L |
| DIAMETER | Ø 571 mm | Ø 571 mm | Ø 571 mm |
| HEATING | electric | electric | electric |
| ELECTRICAL CONNECTION | 208-240V/60/1 380-415V/50/3Ph+N 440V/60/3Ph-N 380-415V/50/3Ph-N | 380-415/50/3Ph+N | 208-240V/50/1Ph |
| ELECTRICAL HEATING | 2,5 Kw | 3 Kw | 1,3 kW |
| NET WEIGHT | 39 kg | 47 kg | 52 kg |
| MACHINE DIMENSIONS H X W X D | 850 X 595 X 585 mm | 850 X 595 X 585 mm | 850 X 595 X 585 mm |
| PACKING DIMENSIONS H X W X D | 915 X 610 X 660 mm | 915 X 610 X 660 mm | 915 X 610 X 660 mm |

По вопросам продажи и поддержки обращайтесь:

| | | | | |
|--|---|--|---|--|
| Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89 Иваново (4932)77-34-06 | Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Липецк (4742)52-20-81 | Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 | Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 | Сургут (3462)77-98-35 Тверь (4822)63-31-35 Томск (3822)98-41-53 Тула (4872)74-02-29 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Ярославль (4852)69-52-93 |
| Киргизия (996)312-96-26-47 | Казахстан (7273)495-231 | Таджикистан (992)427-82-92-69 | | |

Единый адрес для всех регионов: psq@nt-rt.ru || <https://ipso.nt-rt.ru/>